

S-LINE 1.750 - 2.000 CM





TECHNICAL DATA



STANDARD VERSION

Span	1.750 cm	2.000 cm
Side height	350 / 440 / 500 cm	350 / 440 / 500 cm
Ridge height	585 / 686 / 746 cm	618 / 720 / 780 cm
Roof pitch	15 °	15 °
Bay distance / grid	250 cm	250 cm
Main profile	220 x 100 x 3/4 mm	220 x 100 x 3/4 mm
Gable uprights	4	4
Max. wind speed according EN	100 km/h	
Snowload	Up to 1,31 kN/m ²	
Special version	· Sliding gates, rolling gates or doors; sizes on request · Trapeziodal sheet wall covering, stored in track bed on roles movable	
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204	

S-LINE 1.750/350/585 & 1.750/440/686 & 1.750/500/746

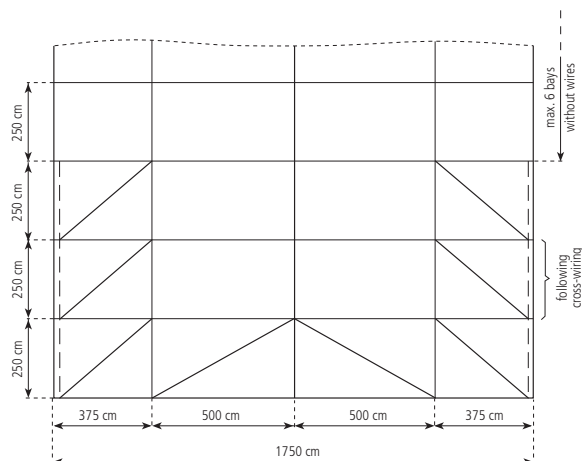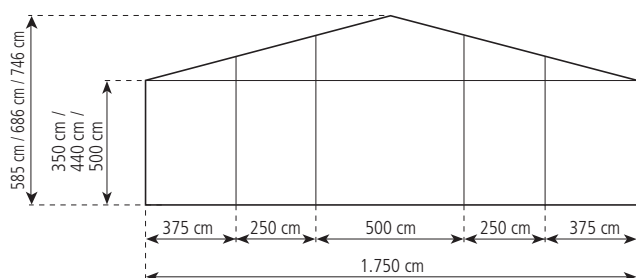

S-LINE 2.000/350/618 & 2.000/440/720 & 2.000/500/780

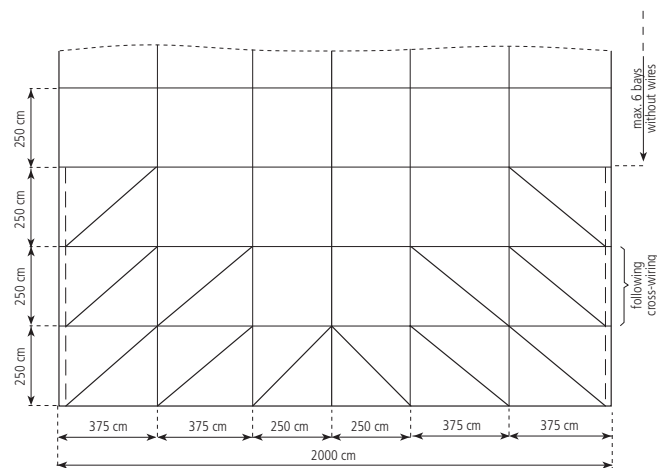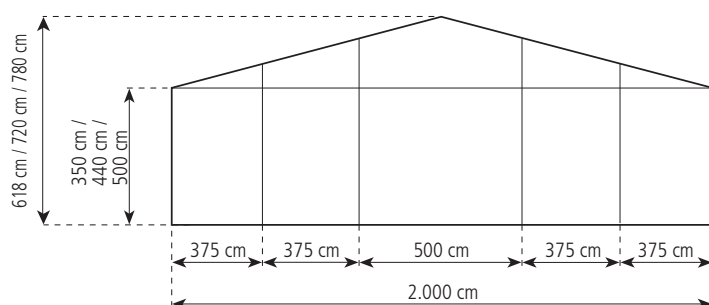

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.