

S-LINE 500 - 1.000 CM





TECHNICAL DATA



STANDARD VERSION

Span	500 cm	750 cm	1.000 cm
Side height	350 / 440 / 500 cm	350 / 440 / 500 cm	350 / 440 / 500 cm
Ridge height	417 / 507 / 576 cm	450 / 540 / 610 cm	484 / 574 / 643 cm
Roof pitch	15°	15 °	15 °
Bay distance / grid	250 cm	250 cm	250 cm
Main profile	130 / 170 x 88 x 3 mm	130 / 170 x 88 x 3 mm	130 / 170 x 88 x 3 mm
Gable uprights	2	2	2
Max. wind speed according EN	100 km/h		
Snowload	Up to 1,31 kN/m²		
Special version	· Sliding gates, rolling gates or doors; Sizes on request · Trapeziodal sheet wall covering, stored in track bed on roles movable		
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204		



S-LINE 500/350/417 & 500/440/507 & 500/500/576

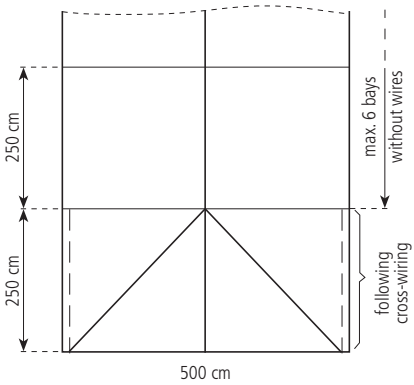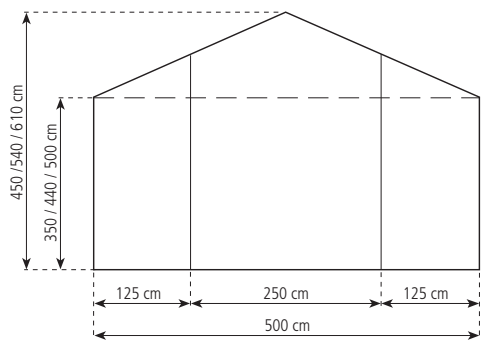

S-LINE 750/350/450 & 750/440/540 & 750/500/610

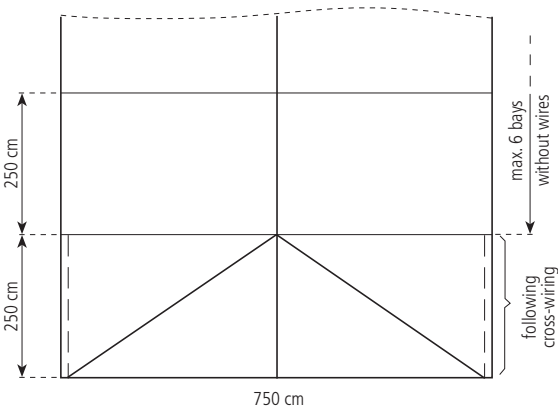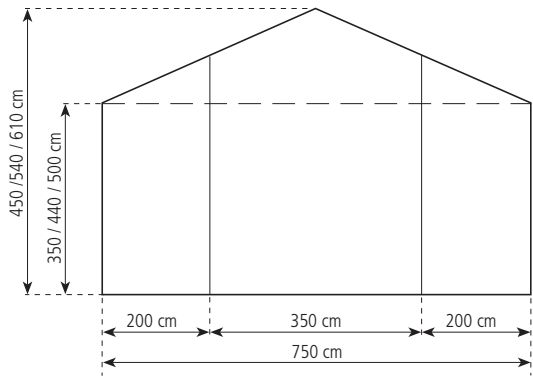

S-LINE 1.000/350/484 & 1.000/440/574 & 1.000/500/643

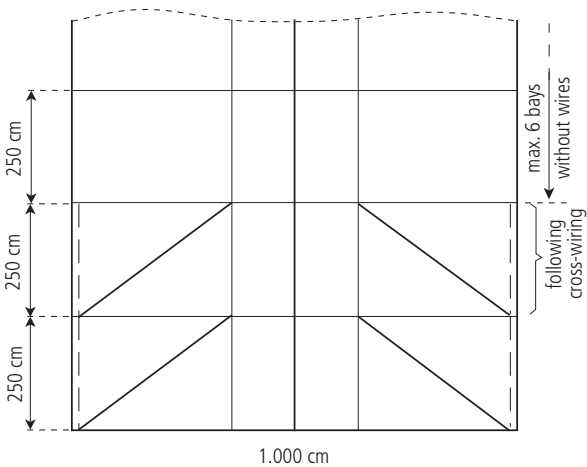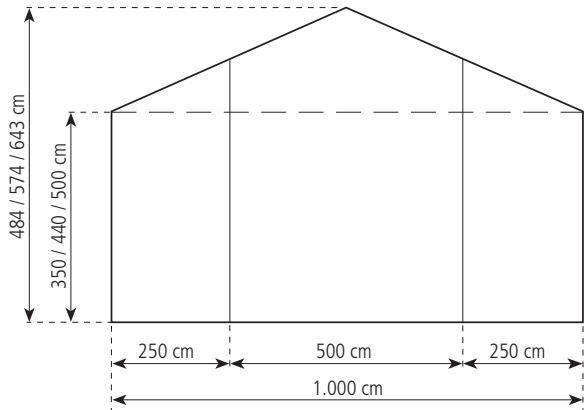

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.