
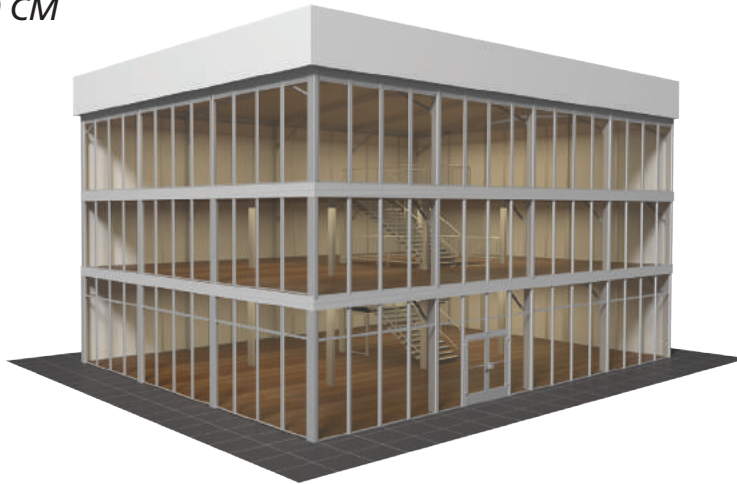
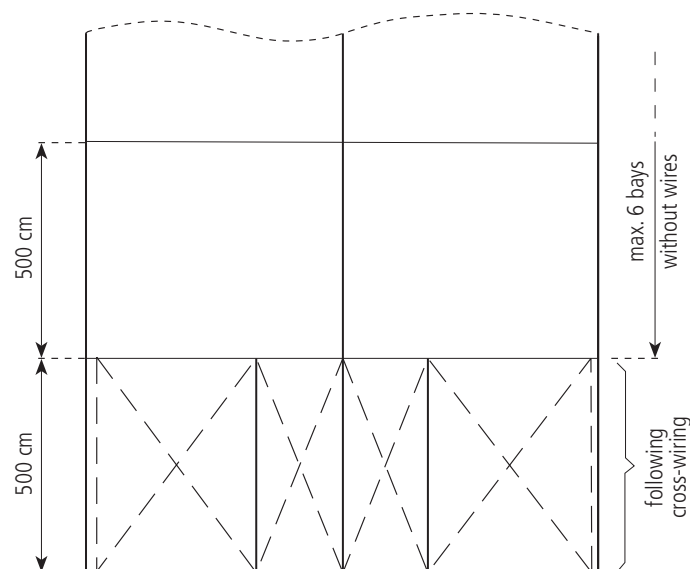


SOLUTION PRIME 1.500 CM

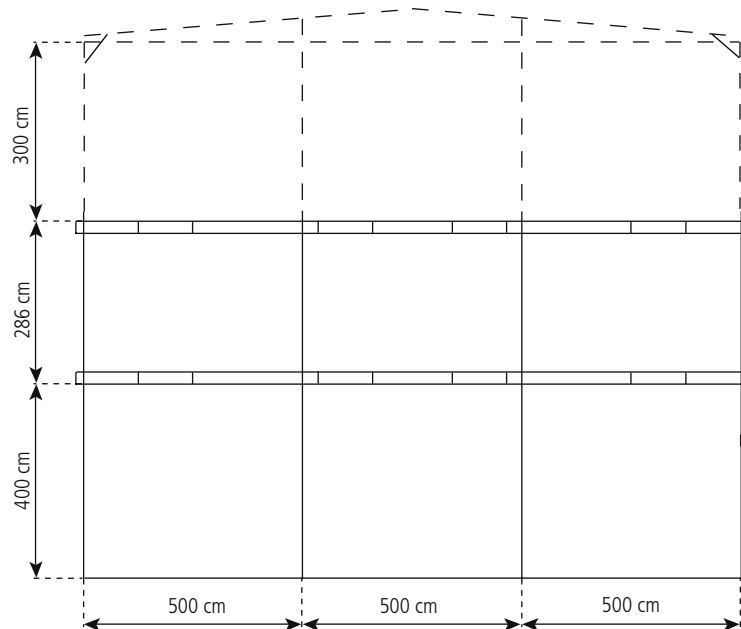

TECHNICAL DATA

STANDARD VERSION	
Span	1.500 cm
Side height main floor	400 cm
Side height 1st floor	286 cm
Side height 2nd floor	300 cm
Ridge height	1.177 cm
Roof pitch	5°
Bay distance / grid	500 cm
Main profile	355 x 124 x 6/12,5 mm + 285 x 124 x 7,5/5,2 mm
Gable uprights	2
Max. wind speed according to EN	130 km/h
Floor	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Heavy-duty floor
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

SOLUTION PRIME 1.500/986/1.177**QUESTIONS AND COMMENTS**

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.